


Main Branch Fusing Diagram and Table (ISPA-120-1P-15A)

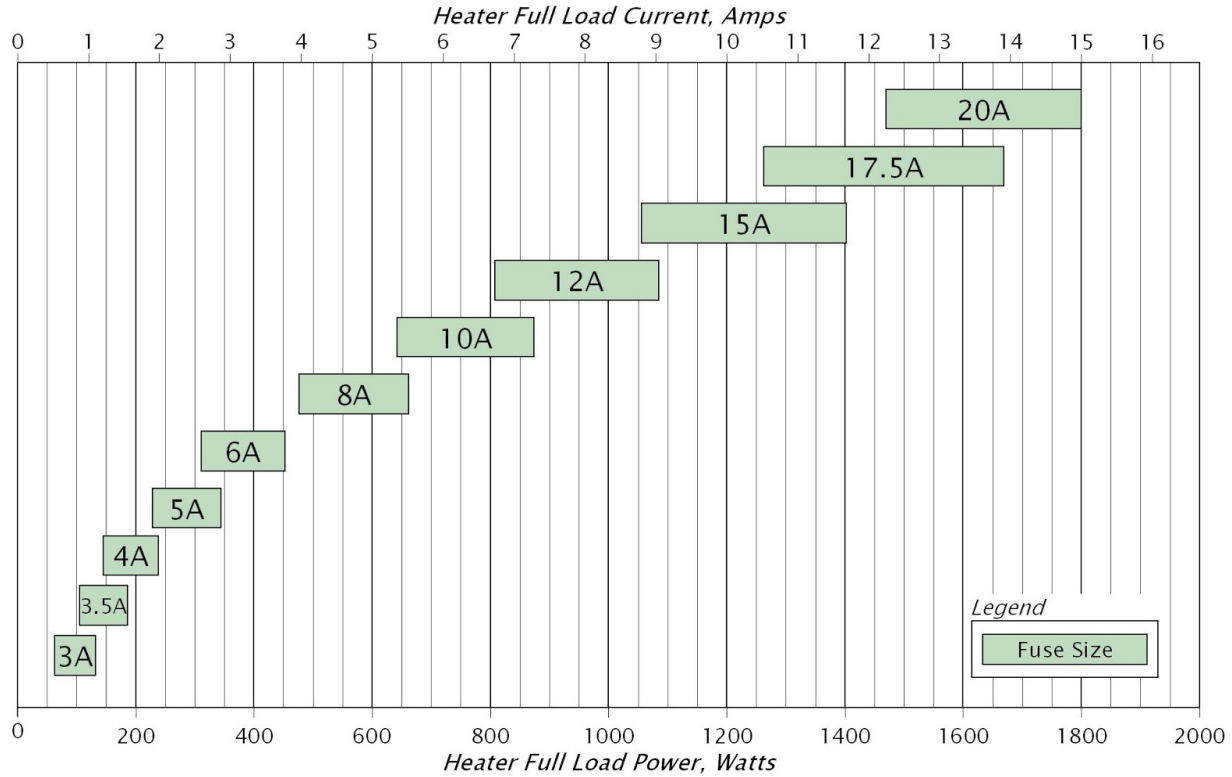

		Fuse Size												
		2A	2.5A	3A	3.5A	4A	5A	6A	8A	10A	12A	15A	17.5A	20A
Power, Watts	Min	150	188	225	263	300	375	450	600	750	900	1125	1313	1500
	Max	192	240	288	336	384	480	576	768	960	1152	1440	1680	1800
FLA, Amps	Min	1.25	1.56	1.88	2.19	2.50	3.13	3.75	5.00	6.25	7.50	9.38	10.94	12.50
	Max	1.60	2.00	2.40	2.80	3.20	4.00	4.80	6.40	8.00	9.60	12.0	14.0	15.0